




## Kawasaki KXF Relay Wire Harness

*Disclaimer: Read instructions completely before installation of the product. We assume you possess the expertise and relevant tools to work on your machine. We also assume you have the OEM/Stock owner's manual or technical service manual for your machine. If you do not possess the skills, knowledge, or tools necessary to perform the installation of electrical and/or aftermarket parts, please see a qualified service provider.*

- Start by removing the seat and fuel tank and locating the battery to make the positive and negative connections on the battery.
- Then locate the 4-pin connector located in the vicinity of the front down tube. In some instances, there will be a connector covering this plug. Simply remove cover plug and install switched power plug.
- Run power output wire under the fuel tank to a suitable location for the lighting you are installing.
- Reinstall the fuel tank and test the light.
- Reassemble your motorcycle.
  - Avoid pinch points around triple clamp, seat, and fuel tank.

**Posi-Tap & Posi-Lock Connector Instructions:** Remove the end cap and place over wire you wish to tap. With wire threaded into cap, tighten cap into the Posi-Tap body.

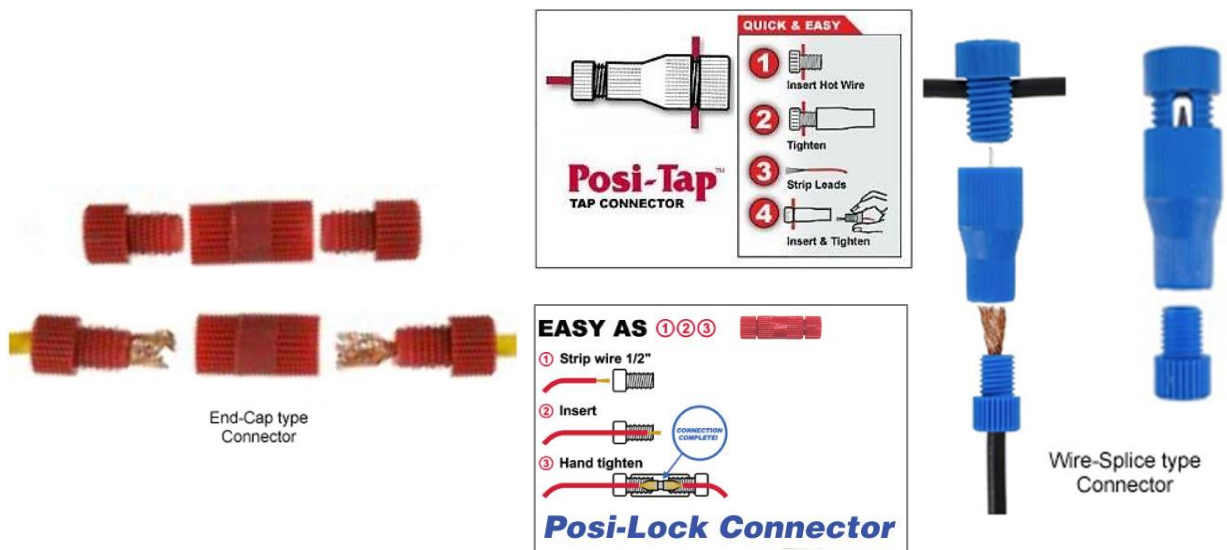

Thank you for your business and please contact us at 1-800-624-0278 with questions.  
Cyclops Adventure Sports

