



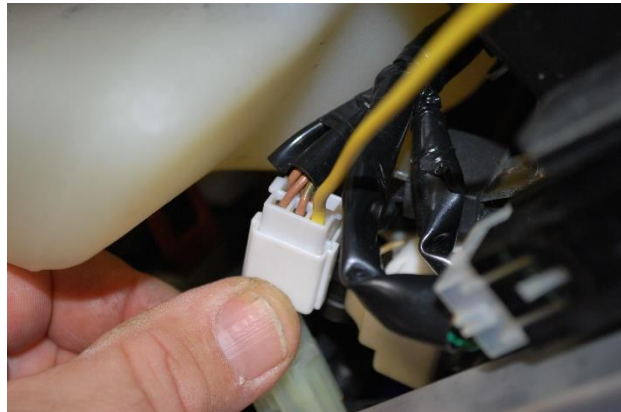

Yamaha YZF Relay Wire Harness

Disclaimer: Read instructions completely before installation of the product. We assume you possess the expertise and relevant tools to work on your machine. We also assume you have the OEM/Stock owner's manual or technical service manual for your machine. If you do not possess the skills, knowledge, or tools necessary to perform the installation of electrical and/or aftermarket parts, please see a qualified service provider.

- Start by removing the seat and fuel tank and locating the battery to make the positive and negative connections on the battery.
- Then locate the bridge connector. This is located on the left side of the bike just below the battery.
 - **This plug has a cap and (three brown) wires and (one brown with a Green/Grey) marking.**
 - Take the switched power (yellow wire) from the relay harness with the silver connector and slide the connector into the bridge plug.
 - **Listen for a click**, this will let you know the connector is properly installed. If not **gently** remove the wire and rotate the connector 180 degrees and try it again.
 - The switched power source is on an approximate 1 minute time delay when timed out the light or other accessories will turn off.

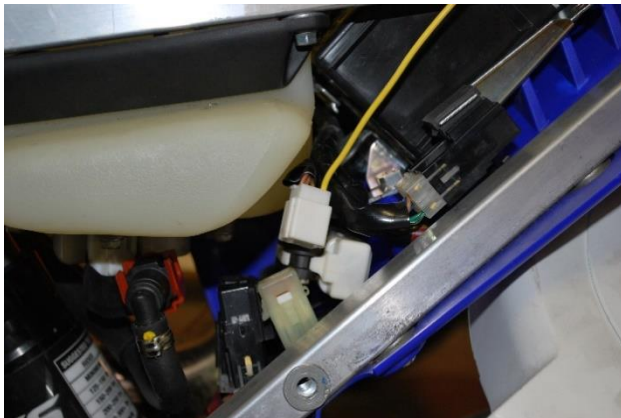

- Run power output wire under the fuel tank to a suitable location for the lighting you are installing.
- Reinstall the fuel tank and test the light.
- Reassemble your motorcycle.
 - Avoid pinch points around triple clamp, seat, and fuel tank.

**Thank you for your business and please contact us at 1-800-624-0278 with questions.
Cyclops Adventure Sports**

