



Explorer Light Bar

Disclaimer: We assume you possess the expertise and relevant tools to work on your machine. We also assume you have the OEM/Stock owner's manual or technical service manual for your machine. If you do not possess the skills, knowledge, or tools necessary to perform the installation of electrical and/or aftermarket parts, please see a qualified service provider.



Installation

- Install Explorer Light Bar using the flat pedestal mount, the round handlebar mount, helmet mount or the optional S.S. mount using the provided hardware (See pictures on back side).
- Use the strap on the switch to attach to the handlebars or mount switch to helmet with provided mount and dual-lock for helmet light systems.
- If you have a machine powered system run the power cord to the battery or relayed harness and make positive and negative connects and secure power cord.

Make sure the light head and switch are connected to "Y" harness before connecting to bike power or Cyclops battery pack!!

Battery Use and Care

- Start by fully charging your new battery, do not remove until the charger light turns green.
- During operation, If the battery runs low, do not continue to try to fire the light at the switch.
- Battery life is increased with repetitive use.
- Store battery with at least a 50% charge.

Switch Operation



Turn On: Hold down the switch for ~3 seconds.

Switch between HIGH and LOW: One press of the button (once light is turned on)

Turn Off: Hold down button for ~3 seconds.

Low Power: The glowing green ring will turn red if there is insufficient power.

Switch Memory: When the bike is turned off the light will stay at whatever setting you were previous at; i.e. if you were on high beam when the bike was shut off, the high beam will come back on when the bike is started again.

The Lithium Battery case is water-resistant.

The Battery case is NOT waterproof.

Do not submerge batteries in water or any other liquid- EXPLOSION/FIRE DANGER

BATTERY SAFETY

Do Not Leave Battery Un-Attended While Charging
Never Charge the Battery in a Wet or Flammable Environment

Do Not charge or use a Swollen or Damaged Battery Pack


Fire Risk

Dispose of battery pack



MOUNTING OPTIONS

Handlebar Mount

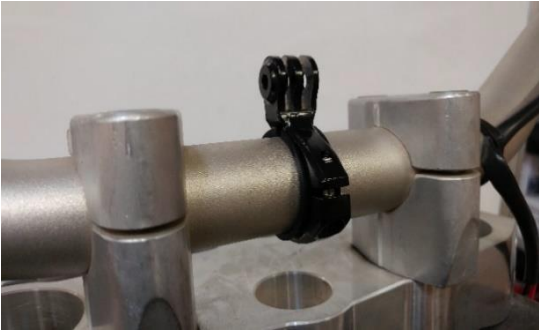

- Be sure to use the included rubber gromet between the bar mount and the bar.
- Rubber gromet may need to be cut to length.
- Use the strap on the switch to attach to handlebars



Flat Pedestal



- Use included hardware to mount on front number plate or any flat surface.
- It is recommended that you drill a hole just above the square flat pedestal bracket to run the power cord through the hole, then attach to wiring.



Stainless Steel Plate



- Remove the factory OEM forward pinch bolts.
- Place the aluminum spacers into the clamps, then the S.S. plate.
- Install the provided bolts and torque to spec.
- Install the flat pedestal onto the S.S. plate with provided hardware.
- Mount the Explorer and aim light.

