




Multi-Function Switch with Integrated Kill

Disclaimer: We assume you possess the expertise and relevant tools to work on your machine. We also assume you have the OEM/Stock owner's manual or technical service manual for your machine. If you do not possess the skills, knowledge, or tools necessary to perform the installation of electrical and/or aftermarket parts, please see a qualified service provider.

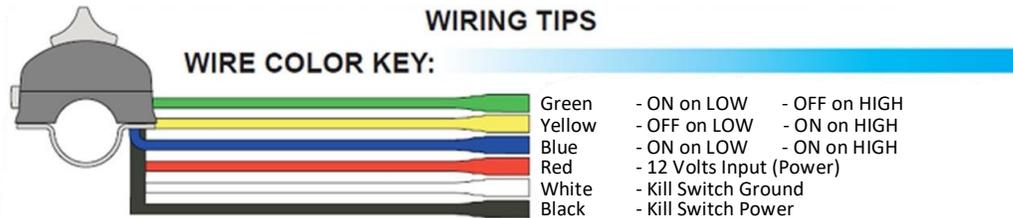

HOW TO:

1. To Enable "KILL" Switch:
Remove the factory kill switch, cut wire. Connect cut wire to black wire on Multi-Function switch. Connect white wire from Multi-Function switch to chassis Ground or battery ground.
2. To run one light on "LOW" and a different light on "HIGH":
Connect "LOW" light power wire to green wire and ground wire to chassis ground.
Connect "HIGH" light power wire to yellow wire and ground wire to chassis ground.
3. To run one light on "LOW and HIGH" and add a second light on "HIGH":
Connect "LOW and HIGH" light power wire to blue wire and ground wire to chassis ground.
Connect second "HIGH" light power wire to yellow wire and ground wire to chassis ground.



Thank you for your business and please contact us at 253-277-0408 with questions
Cyclops Adventure Sports

