

Cyclops BA20D 3600 LED Headlight Module

This Bulb is for DC applications Some bikes may require use of a rectifier

Step One:

Remove headlight old headlight from headlight mask. Ensure that the bulb purchased is correct for your application.


Step Three: After lining up the bulb into position as noted in step two, Secure your Headlight Replacement to your reflector simply twist in a clockwise direction the base will snap into place. Note: If you use the fan housing to twist your bulb may separate from the base. We recommend that you use the base to snap light module into position. As shown below.



Step Two: Your BA20 D base is fixed to your headlight replacement bulb. After removal of the old bulb to install the new bulb line up the bulb so the power wires are in the facing up or approximately in the 10 o'clock position. As shown below.



Step Four: Use the appropriate torx driver to remove the top two screws holding the top of your reflector to the mask. Loosen the middle bottom screw but do not remove. Install the supplied bushing to increase clearance between the back of the bulb and your headstock. As shown below: Reinstall your headlight mask to your motorcycle.

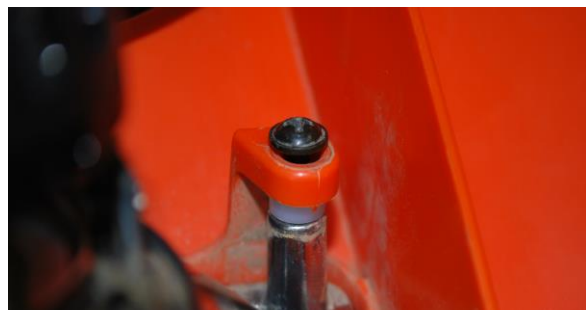

Note: Some bikes do not have a high and low beam switch therefore the high and low beam wires are intentionally left out of the plug. If you would like to run the light on high beam plug in the blue wire to the appropriate location leaving the white wire unconnected and taped back.

Color Codes: Cyclops LED Ground = Green, White = Low Beam, Blue = High Beam

Color Codes: KTM Ground = Brown, Green = Low Beam, Blue = High Beam

Thank You for your purchase. If you have any questions please call us at 1.800.624.0278